Wood & Pellet Products

PRESTIGE
Line

Evolution line

Pocket
02_2021 **EN**

Only for Italy

Seal issued by the German Institute ITQF on the basis of an online survey, representative of the Italian population, conducted in August and September 2021, which collected 265,000 customer ratings from 1616 companies, against payment of an annual licence. For more information see www.istituto-qualita.com/campioni-del-servizio

INDEX

PRESTIGE
Line

Pellet

STOVES 3

Wood

STOVES 4
COOKER 9
FIREPLACE 10

Evolution line

Pellet stoves

VENTILATED STOVES 12
DUCTED STOVES 20
HEATING STOVES 25

Pellet boilers

BOILERS 32

TECHNOLOGY 35

GENERAL PRODUCTS TABLE
OF CONTENTS 36

CERTIFICATES 38

NOTE 40
ENERGY LABEL 40
LEGEND 40

Trademark and copyright:
All brands, pictures, information and photos, products, advertisements and all other features displayed in this catalogue are the exclusive property of La Nordica S.p.A. / Extraflame S.p.A.

PRESTIGE

Line

PERFECT SYMBIOSIS

OF DESIGN

AND WARMTH

New 2021

SABRY

Ventilated pellet stove

PRESTIGE Line

A+ | **7,0** kW-N | **201** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

- Output smoke outlet possibilities: rear
- Radiant surface heat exchanger
- Ergonomic handle
- Extractable burn pot for easy cleaning

TECHNICAL DATA

Nominal power (min-max)
2,5 - 7,0 kW-N

Efficiency (min-max)
92,2 - 90,9 %

Hourly consumption (min-max)
0,6 - 1,6 kg/h

Dimensions (LxHxD)
456 x 924 x 555 mm

Net weight
86 kg

Fumes flue diameter (Ø)
80 mm B

Tank total capacity
~15 kg / ~24 ℓ

Power absorption (min-max)
30 - 60 W

TECHNOLOGY

- Glass cleaning system
- Extractable burn pot for easy cleaning
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- Air-tight seal test at 50 Pa (100% of the products) (50 Pa)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out (AUTO)
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering

Ivory | Black | Bronze

STANDARD EQUIPMENT

REMOTE CONTROL
Backlit IR touch remote control

BLACK LCD

New 2021

DANTE

Wood stove with heat recovery system

PRESTIGE Line

A+ | **8,8** kW-N | **252** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

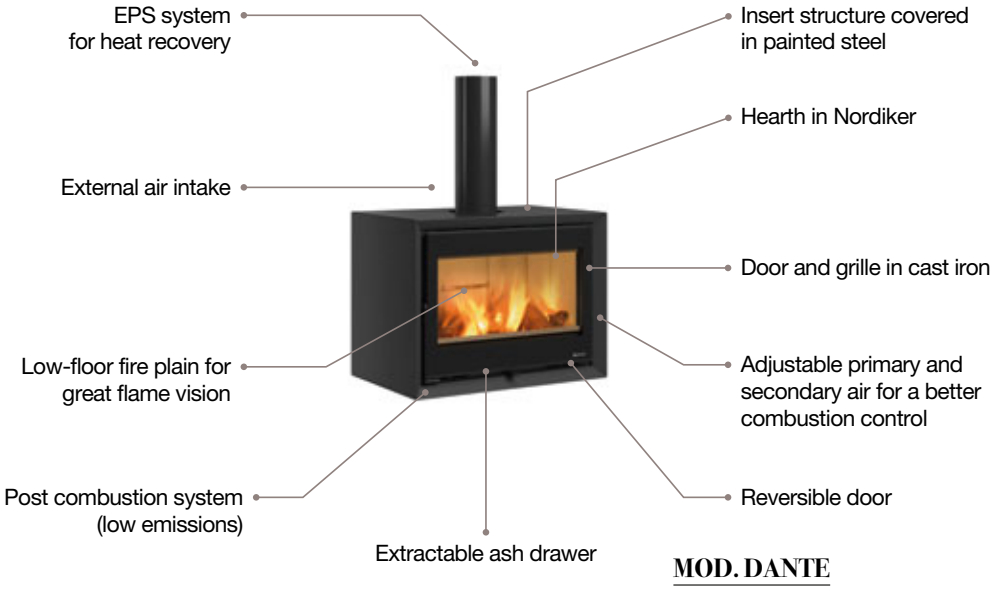

MOD. DANTE

DANTE WITH WOOD HOLDER

TECHNICAL DATA

Nominal power
8,8 kW-N

Efficiency
85,5 %

Hourly consumption
2,4 kg/h

Dimensions (LxHxD)
822 x 1055 x 550 mm

Net weight
Dante 158 kg
Dante with wood holder 183 kg

Fumes flue diameter (Ø)
160 mm T

Hearth opening size (LxH)
626 x 278 mm

Hearth dimensions (LxHxD)
652 x 295 x 350 mm

Wood length (max)
30 cm

TECHNOLOGY

Nordiker® Hearth in Nordiker

Post combustion

Doors in cast iron

Glass cleaning system

Direct outdoor air intake (BBC)

COLOUR CHOICES

High temperature painted steel covering - Matte black

DANTE WITH WOOD HOLDER

Dimensions with wood holder (LxHxD)
822 x 1480 x 553 mm

DANTE WITH BENCH (optional element) Examples of combinations

Dimensions with bench (LxHxD)
1490 x 1525 x 540 mm

STANDARD EQUIPMENT

EPS System
Model with heat recovery system

OPTIONAL

Bench Matte black
LxHxD 1490x470x540 mm
53,5 Kg

LIÙ

Wood burning stove

PRESTIGE Line

A+ | **7,5** kW-N | **215** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

TECHNICAL DATA

Nominal power
7,5 kW-N

Efficiency
86,5 %

Hourly consumption
2,0 kg/h

Dimensions (LxHxD)
537 x 1127 x 490 mm

Net weight
170 kg

Fumes flue diameter (Ø)
130 mm T

Hearth opening size (LxH)
270 x 375 mm

Hearth dimensions (LxHxD)
295 x 420 x 310 mm

Wood length (max)
30 cm

TECHNOLOGY

COLOUR CHOICES

External facing in majolica

Bordeaux White Infinity

Internal facing of the hearth in cast iron and Nordiker

N.B. Enameled cast iron, when used correctly, has almost an unlimited life and requires minimal maintenance.

LIÙ - PIETRA

Wood burning stove

PRESTIGE Line

A+ | **7,5** kW-N | **215** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

TECHNICAL DATA

Nominal power
7,5 kW-N

Efficiency
86,5 %

Hourly consumption
2,0 kg/h

Dimensions (LxHxD)
528 x 1107 x 508 mm

Net weight
201 kg

Fumes flue diameter (Ø)
130 mm T

Hearth opening size (LxH)
270 x 375 mm

Hearth dimensions (LxHxD)
295 x 420 x 310 mm

Wood length (max)
30 cm

TECHNOLOGY

COLOUR CHOICES

Finish in natural stone carved from a single block

Natural stone

Internal facing of the hearth in cast iron and Nordiker

N.B. Enameled cast iron, when used correctly, has almost an unlimited life and requires minimal maintenance.

New 2021

TAHITI

Cast iron wood burning stove

TAHITI EPS

Wood stove with heat recovery system

PRESTIGE Line

TAHITI
A+ | **7,7** kW-N | **220** m³

TAHITI EPS
A+ | **8,0** kW-N | **229** m³

ECODESIGN

Download Technical Sheet Tahiti
SCAN ME

Download Technical Sheet Tahiti EPS
SCAN ME

CHARACTERISTICS

TECHNICAL DATA

Nominal power
Tahiti 7,7 kW-N
Tahiti EPS 8,0 kW-N

Efficiency
Tahiti 81,8 %
Tahiti EPS 87,6 %

Hourly consumption
2,2 kg/h

Dimensions (LxHxD)
Tahiti 746 x 894 x 483 mm
Tahiti EPS 746 x 1373 x 483 mm

Net weight
Tahiti 150 kg
Tahiti EPS 154 kg

Fumes flue diameter (Ø)
150 mm T

Hearth opening size (LxH)
532 x 212 mm

Hearth dimensions (LxHxD)
585 x 290 x 255 mm

Wood length (max)
50 cm

TECHNOLOGY

Nordiker®
Hearth in Nordiker
Post combustion
Doors in cast iron
Glass cleaning system
Direct outdoor air intake (BBC)

COLOUR CHOICES

Finish entirely in enamelled cast iron

Tahiti
Anthracite black

Tahiti EPS
Anthracite black

STANDARD EQUIPMENT - TAHITI EPS

EPS System
Model with heat recovery system

Front and side loading door

N.B. Enameled cast iron, when used correctly, has almost an unlimited life and requires minimal maintenance.

ORIANA

Ventilated or ducted wood burning stove

PRESTIGE Line

A+ | **8,3** kW-N | **238** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

- Power Radiant System
- External air intake
- Wireless Thermostat allows ventilation/ducting to be turned on or off depending on the temperature set on the machine
- Internal facing of the hearth in cast iron and Nordiker
- Ceramic glass
- Wide fire vision
- Ergonomic handle
- Enameled cast iron doors, top and frontal
- Extractable ash drawer
- Front room ventilation with outlet from below

TECHNICAL DATA

Nominal power
8,3 kW-N

Efficiency
85,0 %

Hourly consumption
2,3 kg/h

Dimensions (LxHxD)
636 x 1313 x 554 mm

Net weight
NE 239 kg
PT 264 kg
BIN 228 kg

Fumes flue diameter (Ø)
150 mm T

Hearth opening size (LxH)
326 x 347 mm

Hearth dimensions (LxHxD)
300 x 400 x 360 mm

Wood length (max)
30 cm

Power absorption
35 W

TECHNOLOGY

- Nordiker® Hearth in Nordiker
- Post combustion
- Doors in cast iron
- Glass cleaning system
- Direct outdoor air intake (BBC)

COLOUR CHOICES

Finish in cast iron, majolica or natural stone. Lower plinth and handle in natural wood.

Anthracite black (NE)

White Infinity (BIN)

Natural stone (PT)

ONE STOVE, TWO HEATING MODES

Possibility to convert the stove - during installation - into a ducted product with a single rear 100 mm outlet

FRONT VENTILATION (standard)

REAR DUCTING (modifiable during installation)

ATTENTION: One configuration excludes the other, therefore the stove can work with either ventilation only or ducting only.

WIRELESS THERMOSTAT

Wireless Thermostat (standard), allows ventilation/ducting to be turned on or off depending on the temperature set on the machine

N.B. Enameled cast iron, when used correctly, has almost an unlimited life and requires minimal maintenance.

MILLY

Wood burning cooker

PRESTIGE Line

A+ | **8,7** kW-N | **249** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

- External air intake
- Top food warmer (optional)
- Top cooking plate and rings in polished cast-iron
- Fire door in cast iron with double glass, internal glass ceramic
- Enameled cast iron doors, facade and frame
- Internal facing of the hearth in cast iron and Nordiker
- Ceramic glass
- Adjustable primary and secondary air with a single draft device for a better combustion control
- Porcelain enamelled steel oven 78 l
- Post combustion system (low emissions)
- Extractable ash drawer
- Feets for easy cleaning

TECHNICAL DATA

Nominal power (min-max)
8,7 kW-N

Efficiency
89,1 %

Hourly consumption
2,3 kg/h

Dimensions (LxHxD)
1050 x 865 x 670 mm
(without food warmer)

Net weight
217 kg
(without food warmer)

Fumes flue diameter (Ø)
150 mm B/T

Hearth opening size (LxH)
240 x 185 mm

Hearth dimensions (LxHxD)
270 x 287 x 455 mm

Dimensione Forno (LxHxD)
436 x 418 x 430 mm

Wood length (max)
30 cm

TECHNOLOGY

- Nordiker® Hearth in Nordiker
- Post combustion
- Doors in cast iron
- Glass cleaning system
- Direct outdoor air intake (BBC)

COLOUR CHOICES

Finish in enamelled steel and majolica

Bordeaux

White Infinity

STANDARD EQUIPMENT

ENAMELLED BACKING TRAY (1 piece)

OVEN GRID (1 piece)

OPTIONAL

FOOD WARMER
Bordeaux - White Infinity
Dimensions (LxHxD) 987x710x370mm
Attention: pipe not included

ENAMELLED BACKING TRAY
386x426 mm

OVEN GRID
410x427 mm

N.B. Enameled cast iron, when used correctly, has almost an unlimited life and requires minimal maintenance.

MONOBLOCCO 1000 EVO

Monoblocco for fireplaces

PRESTIGE Line

A+ | **12,3** kW-N | **352** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

TECHNICAL DATA

Nominal power
12,3 kW-N

Efficiency
85,6 %

Hourly consumption
3,4 kg/h

Dimensions (LxHxD)
1136 x 1512-1552 x 597 mm

Net weight
292 kg

Fumes flue diameter (Ø)
200 mm T

Hearth opening size (LxH)
870 x 345 mm

Hearth dimensions (LxHxD)
840 x 447 x 340 mm

Wood length (max)
30 cm

TECHNOLOGY

- Hearth in Nordiker
- Post combustion
- Glass cleaning system
- Direct outdoor air intake (BBC)
- Radiant system (PRS)

COLOUR CHOICES

OPTIONAL

Inox surroundings kit

Casing
Required item for installation of traditional ventilation outlets or Kit "Wind Air"

"Wind Air" kit

Shade diffuser

Wave diffuser

Evolution line

THE TECHNOLOGICAL REVOLUTION OF HEAT

VENTILATED

PELLET STOVES

Evolution line

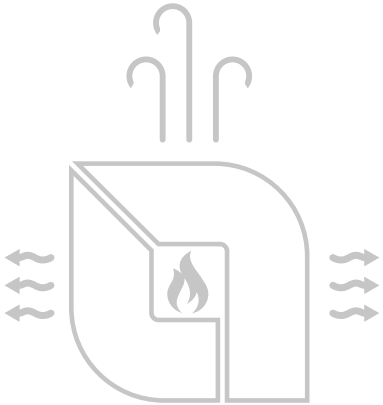

Totally Air-tight

Home control Solution

AIR-TIGHT

SAFE: Air-tight combustion chamber and tank: **technology** and innovation at the service of your safety

THE LATEST GENERATION IGNITION SYSTEM

FAST: For immediate warmth in your home, always and everywhere

HOME CONTROL SOLUTION

INNOVATIVE: Always in contact with your stove, even when you are away from home

OPTIMISED COMBUSTION

EFFICIENT: Reduces the waiting time for relighting, ensuring optimal combustion

CONTROL WITH MULTI-FUNCTION RADIO REMOTE CONTROL HANDHELD DEVICE

AGILE: All the control functions of the stove, but also with a remote thermostat

MOIRA EVO

Ventilated and **hermetic** pellet stove

Evolution line

A+ | **7,0** kW-N | **200** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

- Output smoke outlet possibilities: rear
- Emergency module
- Extractable burn pot for easy cleaning

TECHNICAL DATA

Nominal power (min-max)
2,5 - 7,0 kW-N

Efficiency (min-max)
94,3 - 90,4 %

Hourly consumption (min-max)
0,6 - 1,6 kg/h

Dimensions (LxHxD)
463 x 893 x 528 mm

Net weight
84 kg

Fumes flue diameter (Ø)
80 mm B

Tank total capacity
~11 kg / ~18 ℓ

Power absorption (min-max)
30 - 60 W

TECHNOLOGY

- Glass cleaning system
- Extractable burn pot for easy cleaning
- Auto-adjustment of the fumes extractor (encoder)
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- 50 Pa — Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- AUTO — Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering and majolica top cover

Bordeaux White Black

STANDARD EQUIPMENT

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermostat function

ANGELA EVO

Ventilated and **hermetic** pellet stove

Evolution line

A+ | **8,0** kW-N | **230** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

- Output smoke outlet possibilities: rear
- Emergency module
- Extractable burn pot for easy cleaning

TECHNICAL DATA

Nominal power (min-max)
2,5 - 8,0 kW-N

Efficiency (min-max)
94,7 - 91,5 %

Hourly consumption (min-max)
0,5 - 1,8 kg/h

Dimensions (LxHxD)
490 x 1007 x 528 mm

Net weight
93 kg

Fumes flue diameter (Ø)
80 mm B

Tank total capacity
~15 kg / ~24 ℓ

Power absorption (min-max)
25 - 60 W

TECHNOLOGY

- Glass cleaning system
- Extractable burn pot for easy cleaning
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering and majolica top cover

Bordeaux | Black | White

STANDARD EQUIPMENT

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermo-stat function

New 2021

PAMELA

Ventilated and **hermetic** pellet stove

Evolution line

A+ | **8,0** kW-N | **230** m³

ECODESIGN

Download Technical Sheet Pamela Crystal

SCAN ME

Download Technical Sheet Pamela Steel

SCAN ME

CHARACTERISTICS

- Output smoke outlet possibilities: rear aligned
- Hearth, door fire and brazier in cast iron
- Emergency module
- Extractable burn pot for easy cleaning
- Extractable Ash compartment

TECHNICAL DATA

Nominal power (min-max)
2,5 - 8,0 kW-N

Efficiency (min-max)
92,6 - 91,2 %

Hourly consumption (min-max)
0,6 - 1,8 kg/h

Dimensions (LxHxD)
470 x 1197 x 470 mm

Net weight
130 kg - 140 kg CRY

Fumes flue diameter (Ø)
80 mm B

Tank total capacity
~15 kg / ~24 ℓ

Power absorption (min-max)
28 - 67 W

TECHNOLOGY

- Glass cleaning system
- Extractable burn pot for easy cleaning
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- Air-tight seal test at 50 Pa (100% of the products) (50 Pa)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out (AUTO)
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering or tempered glass

Bronze | Crystal | Tortora

STANDARD EQUIPMENT

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermostat function

OPTIONAL

Kit Glass Night View ROBAX®

DEBBY

Ventilated and **hermetic** pellet stove

DEBBY CX

Ventilated and **hermetic** pellet stove with concentric smoke outlet

Evolution line

A++ | **9,0** kW-N | **258** m³

ECODESIGN

Download Technical Sheet Debby

SCAN ME

Download Technical Sheet Debby CX

SCAN ME

CHARACTERISTICS

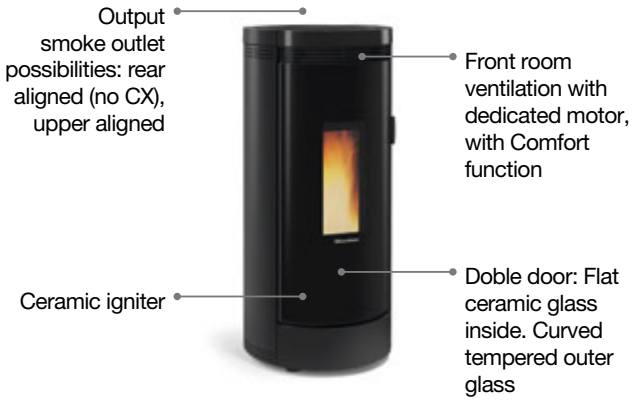

- Shell and tube exchanger
- T tube integrated in the product, inspectable from the rear
- Hearth, door fire and brazier in cast iron
- Emergency module
- Extractable burn pot for easy cleaning
- Extractable ash drawer

Debby CX
Fumes flue and central top air intake.
Installation with coaxial flue pipe.

TECHNICAL DATA

Nominal power (min-max)
3,8 - 9,0 kW-N

Efficiency (min-max)
92,2 - 92,7 %

Hourly consumption (min-max)
0,9 - 2,0 kg/h

Dimensions (LxHxD)
550 x 1200 x 573 mm

Net weight
141 kg
PT 167 kg

Fumes flue diameter (Ø)
Debby 80 mm B/T
Debby CX 130 mm T

Tank total capacity
~18 kg / ~29 ℓ

Power absorption (min-max)
24 - 62 W

TECHNOLOGY

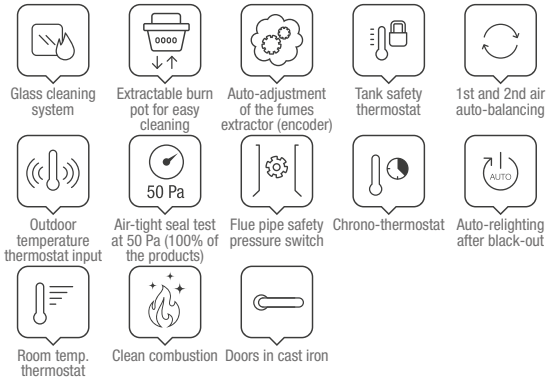

COLOUR CHOICES

High temperature painted steel covering and majolica top cover or natural stone

White | Black | Natural stone (PT)

STANDARD EQUIPMENT

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermostat function

OPTIONAL

Kit Glass Night View ROBAX®

MIETTA EVO

Ventilated and **hermetic** pellet stove

Evolution line

A+ | **9,0** kW-N | **258** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

- Shell and tube exchanger
- Output smoke outlet possibilities: rear
- Combustion chamber probe
- Hearth, door fire and brazier in cast iron
- Emergency module
- Extractable ash drawer
- Possibility to select the power even into the individual slot of chrono

TECHNICAL DATA

Nominal power (min-max)
3,4 - 9,0 kW-N

Efficiency (min-max)
93,9 - 93,1 %

Hourly consumption (min-max)
0,8 - 2,0 kg/h

Dimensions (LxHxD)
496 x 1073 x 579 mm

Net weight
157 kg

Fumes flue diameter (Ø)
80 mm B

Tank total capacity
~20 kg / ~32 ℓ

Power absorption (min-max)
26 - 43 W

TECHNOLOGY

- Glass cleaning system
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- 50 Pa — Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering and majolica top cover

Bordeaux White

STANDARD EQUIPMENT

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermostat function

WENDY

Ventilated and **hermetic** pellet stove

Evolution line

A+ | **10,0** kW-N | **285** m³

ECODESIGN

SCAN ME

CHARACTERISTICS

- Output smoke outlet possibilities: rear
- Shell and tube exchanger
- Combustion chamber probe
- Hearth, door fire and brazier in cast iron
- Emergency module

TECHNICAL DATA

Nominal power (min-max)
2,5 - 10,0 kW-N

Efficiency (min-max)
93,8 - 90,0 %

Hourly consumption (min-max)
0,5 - 2,3 kg/h

Dimensions (LxHxD)
460 x 1139 x 560 mm

Net weight
171 kg

Fumes flue diameter (Ø)
80 mm B

Tank total capacity
~21 kg / ~33 ℓ

Power absorption (min-max)
50 - 70 W

TECHNOLOGY

- Glass cleaning system
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- 50 Pa — Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering and majolica top cover

Bordeaux

White

STANDARD EQUIPMENT

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermostat function

New 2021

SINFONY

Ventilated and **hermetic** pellet stove

Evolution line

A+ | **11,0** kW-N | **315** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

- Output smoke outlet possibilities: rear
- Shell and tube exchanger
- Combustion chamber probe
- Hearth, door fire and brazier in cast iron
- Emergency module
- Single door with doble glass ceramic
- Extractable burn pot for easy cleaning
- Extractable ash drawer
- Removable handle with storage compartment

TECHNICAL DATA

Nominal power (min-max)
3,4 - 11,0 kW-N

Efficiency (min-max)
93,9 - 91,4 %

Hourly consumption (min-max)
0,8 - 2,5 kg/h

Dimensions (LxHxD)
480 x 1140 x 560 mm

Net weight
173 kg

Fumes flue diameter (Ø)
80 mm B

Tank total capacity
~22 kg / ~35 ℓ

Power absorption (min-max)
25 - 45 W

TECHNOLOGY

- Glass cleaning system
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- 50 Pa — Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

Painted steel covered, top and bottom in majolica

White — Bright tortora

STANDARD EQUIPMENT

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermo-stat function

DUCTED PELLET STOVES

Evolution line

The product range with one or more motors dedicated to thermostable duct heating.

UP TO 8 METRES PER DUCT

AIR-TIGHT STOVE

SAFE: Technology and innovation at the service of your safety.

HOME CONTROL SOLUTION

INNOVATIVE: Always in contact with your stove, even when you are away from home

ANGELA PLUS EVO

Hermetic pellet stove with ducting system

Evolution line

A+ | **8,0** kW-N | **230** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

- Ducting system with dedicated motor till 8 mt., thermostable, excludable
- Front room ventilation with dedicated motor, with Comfort function
- Hearth, door fire and brazier in cast iron
- Shell and tube exchanger

- Output smoke outlet possibilities: rear
- Ducting system output possibilities (Ø80 mm): rear
- Emergency module
- Extractable burn pot for easy cleaning
- Extractable Ash compartment



UP TO 8 METRES OF DUCTS through one back output Ø80 (excludable)

TECHNICAL DATA

Nominal power (min-max)
2,5 - 8,0 kW-N

Efficiency (min-max)
94,9 - 91,9 %

Hourly consumption (min-max)
0,5 - 1,8 kg/h

Dimensions (LxHxD)
490 x 1007 x 528 mm

Net weight
98 kg

Fumes flue diameter (Ø)
80 mm B

Tank total capacity
~15 kg / ~24 ℓ

Power absorption (min-max)
50 - 80 W

TECHNOLOGY

- Glass cleaning system
- Extractable burn pot for easy cleaning
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- Air-tight seal test at 50 Pa (100% of the products) (50 Pa)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out (AUTO)
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering and majolica top cover

White | Bordeaux | Black

STANDARD EQUIPMENT

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermostat function

New 2021

GABRIELLA PLUS

Tight and **hermetic** pellet stove with ducting system

Evolution line

A+ | **8,0** kW-N | **230** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

Upper room ventilation with dedicated motor, with Comfort function

Shell and tube exchanger

Ducting system with dedicated motor, till 8 mt., thermostable, excludable

Hearth, door fire and brazier in cast iron

- Output smoke outlet possibilities: upper-backside, upper
- Extractable burn pot for easy cleaning
- Extractable Ash compartment



UP TO 8 METRES OF DUCTS through one back or left side output Ø80 (excludable)

TECHNICAL DATA

Nominal power (min-max)
3,5 - 8,0 kW-N

Efficiency (min-max)
94,1 - 94,0 %

Hourly consumption (min-max)
0,8 - 1,8 kg/h

Dimensions (LxHxD)
750 x 1077 x 350 mm

Net weight
132 kg
PT 160 kg

Fumes flue diameter (Ø)
80 mm B/T

Tank total capacity
~15 kg / ~24 ℓ

Power absorption (min-max)
50 - 90 W

TECHNOLOGY

- Glass cleaning system
- Extractable burn pot for easy cleaning
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering or natural stone

White | Bronze | Natural stone (PT)

STANDARD EQUIPMENT

REMOTE CONTROL
Backlit IR touch remote control

BLACK LCD

New 2021

SHARON PLUS

Tight and **hermetic** pellet stove with ducting system

SHARON PLUS CX

Tight and **hermetic** pellet stove with ducting system with concentric smoke outlet

Evolution line

A+ | **10,0** kW-N | **287** m³

ECODESIGN

Download Technical Sheet Sharon Plus

SCAN ME

Download Technical Sheet Sharon Plus CX

SCAN ME

CHARACTERISTICS

- Extractable burn pot for easy cleaning
- Output smoke outlet possibilities: rear, upper
- Ducting system output possibilities (Ø80 mm): rear
- Radiant surface heat exchanger
- Doble door: Glass ceramic external door
- Wide fire vision
- Reduced depth (slim)
- Emergency module
- Extractable Ash compartment
- Door fire and brazier in cast iron
- With the AUTOMATIC function activated, the stove manages the power output so that the room temperature set by the user remains constant. This minimises power fluctuations to the benefit of thermal and acoustic comfort
- With AIR ZONE CONTROL (AZC) the speed of rotation of the ducting fan is managed with the aim of maximising the transmission of thermal power in the ducted environment

TECHNICAL DATA

Nominal power (min-max)
3,5 - 10,0 kW-N

Efficiency (min-max)
91,7 - 91,0 %
91,2 - 90,7 % CX

Hourly consumption (min-max)
0,8 - 2,3 kg/h

Dimensions (LxHxD)
900 x 1150 x 290 mm

Net weight
155 kg - PT 167 kg
156 kg - PT 168 kg

Fumes flue diameter (Ø)
Sharon Plus 80mm B/T
Sharon Plus CX 130mm T

Tank total capacity
~21 kg / ~33 ℓ

Power absorption (min-max)
30 - 50 W

TECHNOLOGY

- Glass cleaning system
- Extractable burn pot for easy cleaning
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

Glass or natural stone covered

Crystal Natural stone (PT)

STANDARD EQUIPMENT

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermostat function

Sharon PLUS CX
Fumes flue and top air intake.
Installation with coaxial flue pipe.

TERRY PLUS

Hermetic pellet stove with ducting system and two different outlets

Evolution line

A++ | **12,1** kW-N | **347** m³

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

- Output smoke outlet possibilities: rear
- Ducting system output possibilities (Ø80 mm): rear
- Front room ventilation with dedicated motor, with Comfort function
- Extractable hearth (only by authorized assistance)
- Hearth, door fire and brazier in cast iron
- Ergonomic handle
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Emergency module
- Extractable ash drawer



UP TO 16 METRES (8m for 2 outputs) OF DUCTS with 3 independent ventilators that can be managed with 4 time ranges

TECHNICAL DATA

Nominal power (min-max)
3,5 - 12,1 kW-N

Efficiency (min-max)
92,0 - 94,0 %

Hourly consumption (min-max)
0,8 - 2,7 kg/h

Dimensions (LxHxD)
569 x 1151 x 598 mm

Net weight
206 kg

Fumes flue diameter (Ø)
80 mm B

Tank total capacity
~29 kg / ~46 ℓ

Power absorption (min-max)
50 - 96 W

TECHNOLOGY

- Glass cleaning system
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

External facing in majolica

Bordeaux White

STANDARD EQUIPMENT

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermostat function

THE LATEST GENERATION IGNITION SYSTEM

FAST: For immediate warmth in your home, always and everywhere

EXCLUDABLE FORCED VENTILATION

SILENT: silence, without sacrificing efficiency

PWM PUMP AUTOMATICALLY CONTROLLED BY THE ELECTRONIC BOARD

SIMPLE: Relax, the performance of your system is self-adjusting

NEW ELECTRONICS FOR CONNECTING TO THE SYSTEM EXPANSION CARD

FLEXIBLE: Maximum flexibility in the management of comfort in the rooms

HOME CONTROL SOLUTION

INNOVATIVE: Always in contact with your stove, even when you are away from home

SELF-CLEANING BRAZIER

CONVENIENT: your stove cleans itself

OPTIMISED COMBUSTION

EFFICIENT: Reduces the waiting time for relighting, ensuring optimal combustion

Silent and powerful, they distribute the heat rapidly and uniformly throughout the home.

Evolution line

PELLET HEATING STOVES

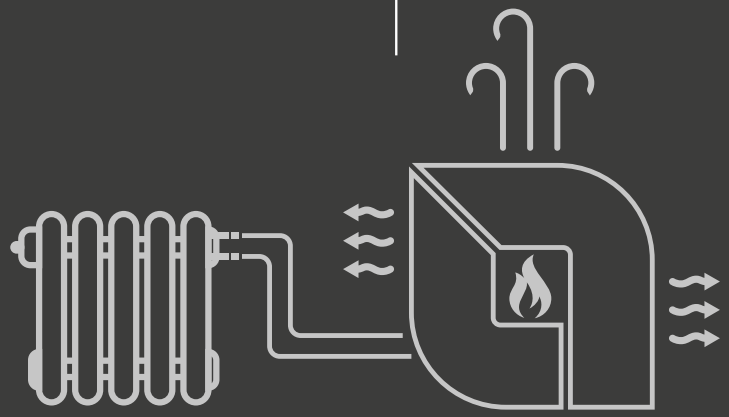

New 2021

ROSANNA IDRO

Hermetic and ventilated pellet thermo-stove

Evolution line

A+ | **14,2** kW-N | **11,0** kW-H_2O | **407** m^3

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

- Pressure transducer and display pressure value indication
- Output smoke outlet possibilities: rear
- Safety valve 3 bar
- Combustion chamber in thick steel
- Air relief valve
- Ergonomic handle
- Door fire and brazier in cast iron
- Thermal and pressure safety
- Expansion tank
- Extractable ash drawer

TECHNICAL DATA

Nominal power (min-max)
4,1 - 14,2 kW-N

Power given back to water (min-max)
2,9 - 11,0 kW-H_2O

Efficiency (min-max)
92,9 - 91,1 %

Hourly consumption (min-max)
0,9 - 3,2 kg/h

Dimensions (LxHxD)
511 x 1150 x 632 mm

Net weight
163 kg

Fumes flue diameter (Ø)
100 mm B

Tank total capacity
~27 kg / ~43 ℓ

Power absorption (min-max)
65 - 95 W

Operating pressure (bar)
3 bar

TECHNOLOGY

- Glass cleaning system
- Extractable burn pot for easy cleaning
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- Air-tight seal test at 50 Pa (100% of the products) (50 Pa)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out (AUTO)
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering and majolica top cover

Ivory | Bordeaux | Bronze

STANDARD EQUIPMENT

REMOTE CONTROL
Backlit IR touch remote control

BLACK LCD

New 2021

GUENDA IDRO

Hermetic and ventilated pellet thermo-stove

Evolution line

A+ | **16,2** kW-N | **14,0** kW-H_2O | **465** m^3

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

- Air relief valve
- Output smoke outlet possibilities: rear
- Wide fire vision
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

TECHNICAL DATA

Nominal power (min-max)
4,6 - 16,2 kW-N

Power given back to water (min-max)
3,6 - 14,0 kW-H_2O

Efficiency (min-max)
90,6 - 90,9 %

Hourly consumption (min-max)
1,1- 3,7 kg/h

Dimensions (LxHxD)
576 x 1157 x 621 mm

Net weight
210 kg

Fumes flue diameter (Ø)
100 mm B

Tank total capacity
~30 kg / ~48 ℓ

Power absorption (min-max)
20 - 40 W

Operating pressure (bar)
3 bar

TECHNOLOGY

- Glass cleaning system
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- 50 Pa — Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- AUTO — Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

High temperature painted steel covering

Ivory | Bronze | Tortora

STANDARD EQUIPMENT

REMOTE CONTROL
Backlit IR touch remote control

BLACK LCD

EVELYNE IDRO

Hermetic ventilated and slim pellet thermo-stove

Evolution line

A++ | **17,5** kW-N | **15,0** kW-H_2O | **500** m^3

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

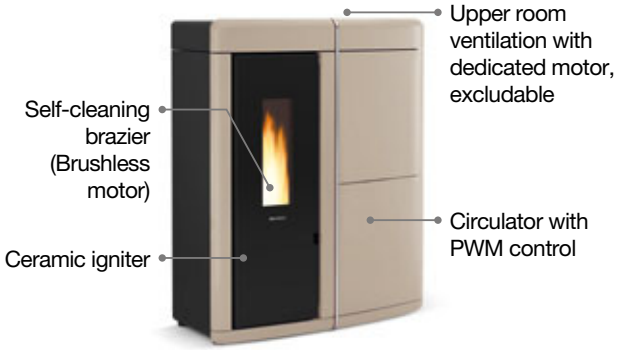

- Air relief valve
- Output smoke outlet possibilities: rear, upper, laterale destro
- Reduced depth (slim)
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Door fire and brazier in cast iron
- Combustion chamber probe
- Doble door: Tempered flat glass external door
- Shell and tube exchanger (manual cleaning)
- Emergency module
- Thermal and pressure safety
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

TECHNICAL DATA

Nominal power (min-max)
5,1 - 17,5 kW-N

Power given back to water (min-max)
4,3 - 15,0 kW-H_2O

Efficiency (min-max)
95,1 - 93,5 %

Hourly consumption (min-max)
1,1 - 3,9 kg/h

Dimensions (LxHxD)
878 x 1099 x 412 mm

Net weight
212 kg

Fumes flue diameter (Ø)
100 mm B/T/RH side

Tank total capacity
~26 kg / ~41 ℓ

Power absorption (min-max)
90 - 110 W

Operating pressure (bar)
2,5 bar

TECHNOLOGY

- Glass cleaning system
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- 50 Pa — Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- AUTO — Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

External facing in majolica

Bordeaux

White

Tortora

STANDARD EQUIPMENT

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermo-stat function

FIANDRA IDRO EVO

Hermetic and ventilated pellet thermo-stove

Evolution line

A+ | **16,2** kW-N | **14,0** kW-H_2O | **465** m^3

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

- Output smoke outlet possibilities: rear
- Wide fire vision
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Combustion chamber probe
- Air relief valve
- Emergency module
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

TECHNICAL DATA

Nominal power (min-max)
4,6 - 16,2 kW-N

Power given back to water (min-max)
3,6 - 14,0 kW-H_2O

Efficiency (min-max)
90,6 - 90,9 %

Hourly consumption (min-max)
1,1 - 3,7 kg/h

Dimensions (LxHxD)
570 x 1145 x 621 mm

Net weight
226 kg

Fumes flue diameter (Ø)
100 mm B

Tank total capacity
~30 kg / ~48 ℓ

Power absorption (min-max)
20 - 40 W

Operating pressure (bar)
3,0 bar

TECHNOLOGY

- Glass cleaning system
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

External facing in majolica

Bordeaux Panna

STANDARD EQUIPMENT

REMOTE CONTROL
Control with radio-controlled "hand-held" device, with thermo-stat function

ISIDORA IDRO H16

Ventilated pellet thermo-stove

Evolution line

A++ | **18,7** kW-N | **16,0** kW-H_2O | **536** m^3

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

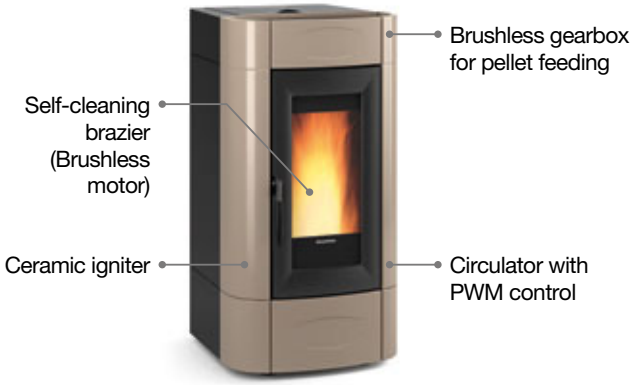

- Air relief valve
- Upper room ventilation with dedicated motor, excludable
- Output smoke outlet possibilities: rear aligned
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Hermetic tank
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Wide fire vision
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

TECHNICAL DATA

Nominal power (min-max)
5,6 - 18,7 kW-N

Power given back to water (min-max)
4,3 - 16,0 kW-H_2O

Efficiency (min-max)
91,5 - 92,4 %

Hourly consumption (min-max)
1,3 - 4,2 kg/h

Dimensions (LxHxD)
596 x 1165 x 708 mm

Net weight
227 kg

Fumes flue diameter (Ø)
100 mm B

Tank total capacity
~33 kg / ~53 ℓ

Power absorption (min-max)
60 - 85 W

Operating pressure (bar)
3 bar

TECHNOLOGY

- Glass cleaning system
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- 50 Pa — Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

Finish in majolica and painted sheet metal

Bordeaux | White | Bright tortora

STANDARD EQUIPMENT

REMOTE CONTROL
Backlit IR touch remote control

DISPLAY BLACK MASK
Display Black Mask with integrated Wi-Fi (App “Total Control 2.0”)

ISIDORA IDRO H20

Ventilated pellet thermo-stove

Evolution line

A++ | **23,2** kW-N | **20,0** kW-H_2O | **665** m^3

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

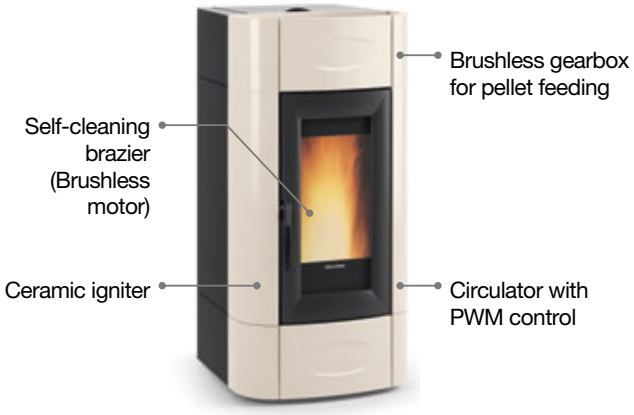

- Air relief valve
- Upper room ventilation with dedicated motor, excludable
- Output smoke outlet possibilities: rear aligned
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Hermetic tank
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Wide fire vision
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

TECHNICAL DATA

Nominal power (min-max)
6,9 - 23,2 kW-N

Power given back to water (min-max)
5,5 - 20,0 kW-H_2O

Efficiency (min-max)
91,2 - 91,5 %

Hourly consumption (min-max)
1,6 - 5,3 kg/h

Dimensions (LxHxD)
596 x 1243 x 708 mm

Net weight
235 kg

Fumes flue diameter (Ø)
100 mm B

Tank total capacity
~38 kg / ~61 ℓ

Power absorption (min-max)
65 - 85 W

Operating pressure (bar)
3 bar

TECHNOLOGY

- Glass cleaning system
- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- Air-tight seal test at 50 Pa (100% of the products)
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out
- Room temp. thermostat
- Clean combustion
- Doors in cast iron

COLOUR CHOICES

Finish in majolica and painted sheet metal

Ivory Bordeaux

STANDARD EQUIPMENT

REMOTE CONTROL
Backlit IR touch remote control

DISPLAY BLACK MASK
Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")

PELLET BOILERS

Evolution line

Saving, comfort and technology

THE LATEST GENERATION IGNITION SYSTEM

FAST: For immediate warmth in your home, always and everywhere

PWM PUMP AUTOMATICALLY MANAGED BY THE ELECTRONIC CARD

SIMPLE: Relax, the performance of your system is self-adjusting

NEW ELECTRONICS FOR CONNECTION TO THE PLANT'S EXPANSION CARD

FLEXIBLE: Maximum flexibility in the management of comfort in the rooms

HOME CONTROL SOLUTION

INNOVATIVE: Always in contact with your stove, even when you are away from home

SELF-CLEANING BRAZIER

CONVENIENT: your stove cleans itself

OPTIMISED COMBUSTION

EFFICIENT: Reduces the waiting time for relighting, ensuring optimal combustion

PR20

Pellet boiler with ash estractor

Evolution line

A+ | **20,0** kW-N | **20,0** kW-H_2O | **573** m^3

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS





- A Hydraulic connections at the top
- B Output smoke outlet possibilities: rear, left lateral
- Air relief valve
- Minimum pellet tank level probe
- Combustion chamber in thick steel
- Combustion chamber probe
- Door fire and brazier in cast iron
- Thermal and pressure safety
- Shell and tube exchanger (automatic cleaning)
- Front pellet tank feeding
- Expansion tank
- Wheels to facilitate movement
- Safety valve 3 bar
- Innovative adaptive system to adjust and even the combustion air inlet

TECHNICAL DATA

Nominal power (min-max)
5,7 - 20,0 kW-N

Power given back to water (min-max)
5,7 - 20,0 kW-H_2O

Efficiency (min-max)
88,4 - 92,4 %

Hourly consumption (min-max)
1,4 - 4,6 kg/h

Dimensions (LxHxD)
822 x 1398 x 817 mm

Net weight
310 kg

Fumes flue diameter (Ø)
100 mm B/LH side

Tank total capacity
~75 kg / ~119 ℓ

Power absorption (min-max)
60 - 65 W

Operating pressure (bar)
3 bar

TECHNOLOGY

- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out
- Clean combustion

COLOUR CHOICES

High temperature painted steel covering

Light grey / Dark grey

STANDARD EQUIPMENT

DISPLAY BLACK MASK
Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")

PLANT EXPANSION CARD KIT

OPTIONAL

Automatic loading pellet
stocking tank
(Total capacity Kg 300)

PR30

Pellet boiler with ash estractor

Evolution line

A+ | **30,0** kW-N | **30,0** kW-H_2O | **860** m^3

ECODESIGN

Download Technical Sheet

SCAN ME

CHARACTERISTICS

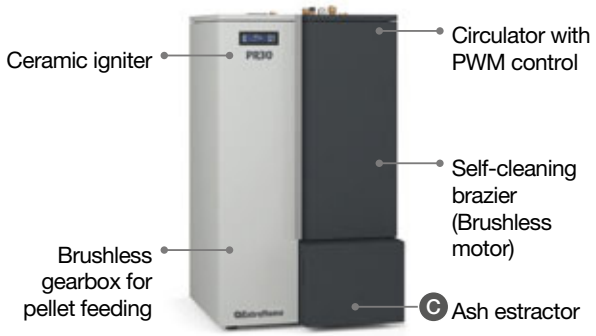



- A Hydraulic connections at the top
- B Output smoke outlet possibilities: rear, left lateral
- Air relief valve
- Minimum pellet tank level probe
- Combustion chamber in thick steel
- Combustion chamber probe
- Door fire and brazier in cast iron
- Thermal and pressure safety
- Shell and tube exchanger (automatic cleaning)
- Front pellet tank feeding
- Expansion tank
- Wheels to facilitate movement
- Safety valve 3 bar
- Innovative adaptive system to adjust and even the combustion air inlet

TECHNICAL DATA

Nominal power (min-max)
8,9 - 30,0 kW-N

Power given back to water (min-max)
8,9 - 30,0 kW-H_2O

Efficiency (min-max)
92,7 - 92,4 %

Hourly consumption (min-max)
2,0 - 6,8 kg/h

Dimensions (LxHxD)
892 x 1398 x 817 mm

Net weight
325 kg

Fumes flue diameter (Ø)
120 mm B/LH side

Tank total capacity
~75 kg / ~119 ℓ

Power absorption (min-max)
70 - 85 W

Operating pressure (bar)
3 bar

TECHNOLOGY

- Auto-adjustment of the fumes extractor (encoder)
- Tank safety thermostat
- 1st and 2nd air auto-balancing
- Outdoor temperature thermostat input
- Flue pipe safety pressure switch
- Chrono-thermostat
- Auto-relighting after black-out
- Clean combustion

COLOUR CHOICES

High temperature painted steel covering

Light grey / Dark grey

STANDARD EQUIPMENT

DISPLAY BLACK MASK
Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")

PLANT EXPANSION CARD KIT

OPTIONAL

Automatic loading pellet
stocking tank
(Total capacity Kg 300)

TECHNOLOGY

PELLET

WOOD-BURNING

Glass cleaning system
A system of pre-heated air which removes any deposit from the fire-door glass.

Extractable burn pot for easy cleaning
The burn pot's system of construction allows easy extraction for quick and complete cleaning.

Auto-adjustment of the fumes extractor (encoder)
It keeps the RPM of the fumes motor constant, to ensure correct combustion of the product.

Hearth in Nordiker
La Nordica-Extraflame uses a special material called Nordiker for the production of hearth walls refractories.

Post combustion
The combustion system developed by La Nordica-Extraflame allows, due to a secondary/tertiary air system, a post combustion which significantly reduces emissions.

Hopper safety thermostat
Ensure always high safety standard, preventing the overheting of the product in case of anomaly.

1st and 2nd air auto-balancing
Primary and secondary air electronically balanced for an optimal combustion and thermal efficency.

Outdoor temperature thermostat input
The product interfaces with room temperature control devices (thermostat or contacts) to achieve the selected temperature in every room.

Doors in cast iron
The high-quality cast-iron doors are made to last and ensure perfect sealing at all times.

Automatic safety device
It is a safety device created to quickly reduce water temperature, according to rules in force. DSA valve not included.

Air-tight seal test at 50 Pa (100% of the products)
All the air-tight products, or even those that have some "air-tight" components (like the hopper), are tested under high pressure at the end of the production line to ensure their safety and optimal performance.

Flue pipe safety pressure switch
Checks the correct evacuation of the fumes and, in case of need, locks the loading of pellets, to avoid problems on the generator.

Chrono-thermostat
Chronothermostat provided with temperature control divided in four daily slots for an optimal rooms management.

Glass cleaning system
A system of pre-heated air which removes any deposit from the fire-door glass.

Direct outdoor air intake (BBC)
Air intake system which draws fresh air from outside directly into the adjust system combustion regulation of the firebox of the appliance.

Auto-relighting after black-out
Following a black out the appliance automatically re-starts after having carried out the scheduled auto-control.

Room temp. thermostat
The room probe optimizes comfort and lowers noticeably the consumption.

Clean combustion
Increases the combustion efficency and the duration of parts subject to wear duration reducing at the same time the ordinary brazier cleaning.

Outdoor air intake (ASC)
A particular connection system which allows to introduce air from the outside into the pre-heated environment around the fire-box.

Radiant system (PRS)
Hight efficency Heat exchanger system

N.B.: The technical specifications are verified for every single product

GENERAL PRODUCTS TABLE OF CONTENTS

Page no.	Article description	Finish Colour	DM186	Conto termico 2.0 (Coefficiente premiante)	Flamme Verte	DTA	BImSchV	15a B-VG	Ecodesign
PRESTIGE LINE									
3	SABRY	IVORY BRONZE BLACK	★★★★	1,5	7★		✓	✓	✓
4	DANTE	MATTE BLACK	★★★★	1,2	7★		✓	✓	✓
4	DANTE CON PORTALEGNA	MATTE BLACK	★★★★	1,2	7★		✓	✓	✓
5-6	LIU’	WHITE INFINITY BORDEAUX NATURAL STONE	★★★★	1,5	7★		✓	✓	✓
9	MILLY	WHITE INFINITY BORDEAUX	★★★★		7★		✓	✓	✓
10	MONOBLOCCO 1000 EVO		★★★★	1,5	7★		✓	✓	✓
8	ORIANA	ANTHRACITE BLACK WHITE INFINITY NATURAL STONE	★★★★	1,5	7★		✓	✓	✓
7	TAHITI	ANTHRACITE BLACK	★★★★		7★		✓	✓	✓
7	TAHITI EPS	ANTHRACITE BLACK	★★★★	1,5	7★		✓	✓	✓
EVOLUTION LINE									
14	ANGELA EVO	WHITE BORDEAUX BLACK	★★★★	1,5	7★	✓	✓	✓	✓
21	ANGELA PLUS EVO	BORDEAUX BLACK WHITE	★★★★	1,5	7★	✓	✓	✓	✓
33	CALDAIA PR20	LIGHT GREY / DARK GREY	★★★★★	1,5	7★		✓	✓	✓
34	CALDAIA PR30	LIGHT GREY / DARK GREY	★★★★★	1,5	7★		✓	✓	✓
16	DEBBY	WHITE BLACK NATURAL STONE	★★★★	1,5	7★		✓	✓	✓
16	DEBBY CX	WHITE BLACK NATURAL STONE	★★★★	1,5	7★	✓	✓	✓	✓
28	EVELYNE IDRO	WHITE BORDEAUX TORTORA	★★★★	1,5	7★		✓	✓	✓

GENERAL PRODUCTS TABLE OF CONTENTS

Page no.	Article description	Finish Colour	DM186	Conto termico 2.0 (Coefficiente premiante)	Flamme Verte	DTA	BImSchV	15a B-VG	Ecodesign
29	FIANDRA IDRO EVO	BORDEAUX PANNA	★★★★	1,5	7★		✓	✓	✓
22	GABRIELLA PLUS	WHITE BRONZE NATURAL STONE	★★★★	1,5	7★	✓	✓	✓	✓
27	GUENDA IDRO	BRONZE TORTORA IVORY	★★★★	1,5	7★		✓	✓	✓
30	ISIDORA IDRO H16	WHITE BORDEAUX BRIGHT TORTORA	★★★★	1,5	7★		✓	✓	✓
31	ISIDORA IDRO H20	IVORY BORDEAUX	★★★★	1,5	7★		✓	✓	✓
17	MIETTA EVO	WHITE BORDEAUX	★★★★	1,5	7★	✓	✓	✓	✓
13	MOIRA EVO	WHITE BORDEAUX BLACK	★★★★	1,5	7★	✓	✓	✓	✓
15	PAMELA	BRONZE CRYSTAL TORTORA	★★★★	1,5	7★	✓	✓	✓	✓
26	ROSANNA IDRO	IVORY BORDEAUX BRONZE	★★★★	1,5	7★		✓	✓	✓
23	SHARON PLUS	CRYSTAL NATURAL STONE	★★★★	1,5	7★	✓	✓	✓	✓
23	SHARON PLUS CX	CRYSTAL NATURAL STONE	★★★★	1,5	7★	✓	✓	✓	✓
19	SINFONY	WHITE BRIGHT TORTORA	★★★★	1,5	7★	✓	✓	✓	✓
24	TERRY PLUS	WHITE BORDEAUX	★★★★	1,5	7★	✓	✓	✓	✓
18	WENDY	WHITE BORDEAUX	★★★★	1,5	7★	✓	✓	✓	✓

CERTIFICATES

Italian Regulation for the Environmental Certificate release of domestic solid fuels biomass room heaters (Classification from 1 up to 5 stars).

CONTO TERMICO
Per maggiori informazioni consultare il nostro sito:
www.lanordica-extraflame.com

Only for Italy: the Ministerial Decree 28/12/12, better known as “Conto Termino”, allows a specific incentive in case of replacement of old appliances by new ones with certain characteristics

French trademark of the ADEME agency for the environmement and the energy. The products “Flamme Verte” approved guarantee the best high energy performances and respect for the environment.

Certification issued by the French Scientific and Technical Building Centre – CSTB – for watertight devices tested in watertight installation conditions.

Certification issued by the German Federal Office for Economics and Export Control to promote the efficient use of biomass energy.

BImSchV

German regulations on controlling emissions.

15a B-VG

Compliance with article 15 of the Austrian federal constitutional law on environmental protection measures.

ECODESIGN

European certification defining the ecodesign guidelines for biomass products.

MFB

Only for Germany: The products is ready to be connected to a multiply chimney connection , just when the installation is made in accordance with requirements of the regional and national standards, and when observed the norms DIN EN 13384-2, DIN V 1816-1, DIN 18896 and MFeuV-2007 (Muster-Feuerungsverordnung), and that the district chimney sweeper has checked and approved the correct installation.

PURE HEAT
MADE IN ITALY
MGA GROUP
LA NORDICA®
Extraflame
Warms up your life.
50
SINCE 1968
www.lanordica-extraflame.com

NOTE

- Due to printing reasons the reproduction of colours has to be considered only indicative.
- The fuel quantity (weight) inside the hopper and the hour consumption can change depending on the type of pellet which is used.
- All the figures were measured using approved pellets in compliance with EN ISO 17225-2.
- Facing tones and characteristics are subject to slight variations because they are natural products.
- The manufacturer reserves the right to change the products without any previous notice.
- The La Nordica-Extraflame products can be covered by industrial property rights (such as patents, designs and trademarks) owned by La Nordica-Extraflame exclusively. It is strictly forbidden to violate these rights as for removing, cancelling or corrupting the rademarks impressed on the products and impressing others.
- m^3 that can be heated: the data is indicative. For the generator to be sized correctly, contact a skilled technician/ designer.
- Before the purchase, ask your reseller all the information regarding the appliance. One must also bear in mind all laws and national, regional, provincial and town council Standards present in the country in which the appliance has been installed, as well as the instructions contained in this manual.
- The images contained in this document are for product illustration purposes only and do not represent indications for the performance or technical characteristics of the same.
- The data in the catalogue can be rounded off to the first decimal.
- La Nordica-Extraflame products are approved to work with 230V 50Hz power supply only. The use with different voltages and / or frequencies suply can compromise the functionality and safety of the products.

ENERGY LABEL

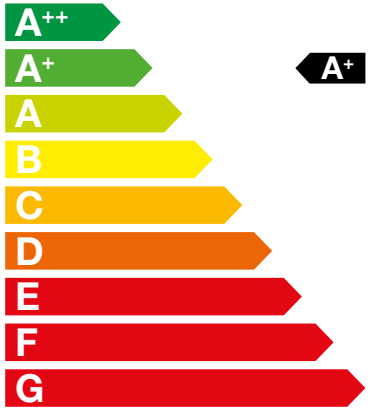

As of 1st Jannuary 2018 the Energy Labelling Regulation came into force also for all the biomass heating appliances, both roomheater appliances and appliances designed to heat the water for central heating and domestic hot water.

This directive, in accordance with the regulations of the European Union, will assign an Energy Efficiency Class (from G up to A++) providing the buyers with information about the consumption and the efficiency

LEGEND

kW-N: Nominal thermal power (kW)

kW-H_2O: Power given back to water (kW)

m^3: Heatable m^3 (30 kcal/h x m^3)

%: Efficiency (%)

kg-l: Feed box Total capacity (kg-l)

kg/h: Hourly consumption (kg/h)

Ø mm: Smoke outlet diameter (mm)
T = Top
B = Back
RH side = Right side
LH side = Left side

Dim. LxHxD: Dimensions LxHxD (mm)

kg: Net weight (kg)

W: Electric consumption (W)

bar: Working pressure (bar)

Warms up your life.

SINCE 1968

La Nordica S.p.A.
Via Summano, 104 • 36030 Montecchio Precalcino - Vicenza - Italy
Tel. +39 0445 804000 • Fax +39 0445 804040
info@lanordica.com

Extraflame S.p.A.
Via dell'Artigianato, 12 • 36030 Montecchio Precalcino - Vicenza - Italy
Tel. +39 0445 865911 • Fax +39 0445 865912
info@extraflame.it

www.lanordica-extraflame.com

© 2021 La Nordica SpA - Extraflame SpA - All rights reserved - LN-EX 11/21

9299996-002

MGA Group